



PLASTY – SPEEDY

PLASTIČNI LINIJSKI PODNI DISTANCER - CIK CAK




- » Completely PVC free
- » Gray color
- » Production standard of 1m bars
- » Designed to permit the best concrete flow possible
- » Ideal for heavy rebar loads

USES

- » Structures in V.R.C. and P.R.C. (vibrated & pre-compressed RC)
- » Cladded elements (non-exposed concrete)
- » Civil construction
- » Floors
- » Beams
- » Foundations
- » Industrial floors on concrete or lean concrete planes

ADVANTAGES

- » The risk of casting discontinuances is eliminated
- » Excellent stability and heavy load resistance
- » Quick positioning
- » Safer in case of fire as it is,, PVC free"
- » Compared to other linear spacers it is the best.

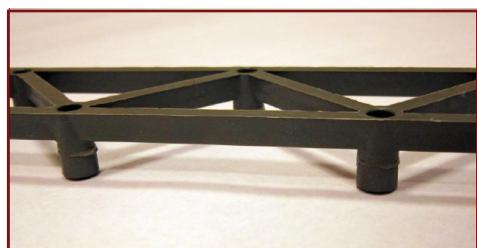

- » Potpuno besplatan PVC.
- » Siva boja.
- » Standardna proizvodnja šipki od 1m.
- » Dizajniran da omogući najbolji mogući protok betona.
- » Idealan za teške armature i velika opterećenja.
- UPOTREBA:**
- » Kod konstrukcija od V.R.C. i P.R.C. (Vibrirani i kompresovani betoni).
- » Nosećih elemenata (neizloženi beton).
- » Građevinski,podovi,grede,temelji.
- » Industrijski betonski podovi ili tanji betonski elementi.

PREDNOSTI:

- » Rizik od prekida u elementu prilikom livenja je eliminisan.
- » Odlična stabilnost i velika mogućnost opterećenja.
- » Brzo pozicioniranje.
- » Sigurnost u slučaju požara.
- » U poređenju sa drugim linijskim podmetačima - odstojnicima je najbolji.

CODE CODE ŠIFRA	NAME NOM PROIZVOD	DIST. FORMWORK in mm ESP. COFFRAGE en mm ZAŠTITNI SLOJ mm	PACKAGES Pcs EMBALLAGE Pz PAK. KOM.	Pcs PER PALLET Pz PAR PALETTE KOM. NA PALETI
PSP20	PLASTY-SPEEDY 20	20	50	5750
PSP25	PLASTY-SPEEDY 25	25	50	4750
PSP30	PLASTY-SPEEDY 30	30	50	4000
PSP35	PLASTY-SPEEDY 35	35	50	3000
PSP40	PLASTY-SPEEDY 40	40	50	3000
PSP45	PLASTY-SPEEDY 45	45	50	2250
PSP50	PLASTY-SPEEDY 50	50	50	2250